

MAYTAG® COMMERCIAL LAUNDRY
FULL LINE CATALOG

ON-PREMISES LAUNDRY



LAUNDRY **SOLUTIONS** YOU CAN **DEPEND ON**



PUTTING A NEW SPIN ON *SPEED AND EFFICIENCY.*

When Maytag thinks laundry, we don't just think about capacity. We think about how to get the job done **faster with less labor and more energy savings**—all of which help you operate more profitably.


Hotels, hospitals, health clubs, beauty salons—no matter the size or scope of your business—Maytag's broad lineup offers you the right equipment choices. Not only can our machines help you clean more laundry in less time, but our Energy Advantage™ washers and dryers are also **more efficient to help you save on utility costs.**

True to our heritage, every Maytag® unit is designed to deliver dependable performance over years of continuous use—from our single-load washers and dryers to our high-speed washer-extractors with chemical injection. With fewer hassles to handle, along with gains in productivity and efficiency, you'll ultimately see **a big difference on your bottom line.**


You can trust our professional Maytag distributors to work with you in determining the right solutions for your needs. They'll help you design a new laundry room or renovate an existing one, set up and install the equipment, and provide you with fast, reliable Maytag service to keep your operation running smoothly. That's important, especially when an uninterrupted supply of clean linens is a must.

**Remember, it's not just your laundry on the line—it's your business.
And you can count on the dependability of Maytag.**


Our line of **ENERGY ADVANTAGE™ WASHERS AND DRYERS** gives you more high-speed, high-efficiency options than ever. The job is done faster with less labor and more energy savings, slashing your operational costs.

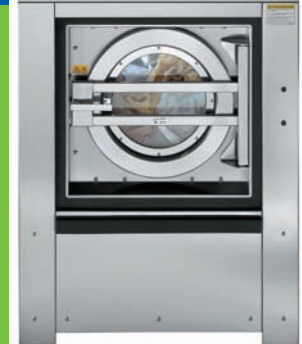


Advanced Computer Controls

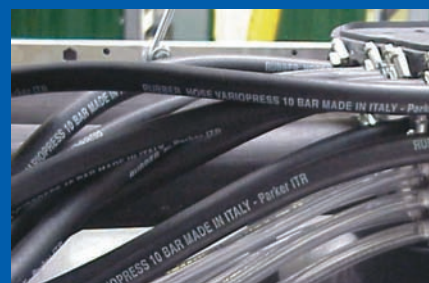

Chemical Injection

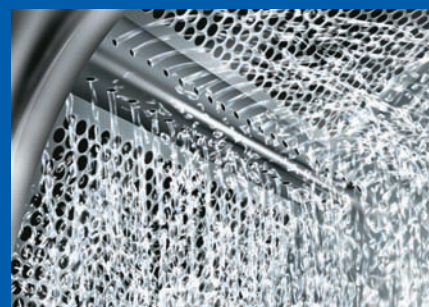

TurboWash™

Advanced computer controls, with 15 pre-programmed cycles, make it easy for anyone to operate the equipment with the simple touch of a button. You can create up to 99 customized cycles for each load type. Select models offer microprocessor controls that provide simple, one-touch cycle selection and multi-lingual readouts that make them easy for everyone to use. Both ease of use and safety are enhanced by external chemical injection hookups that allow service and repair from outside of the machine.

Maytag® Energy Advantage™ soft-mount, high-speed washer-extractors offer spin speeds of up to 1,000 rpm with up to 350 G's extraction force, resulting in shorter dry times and decreased cycle times to help your operation run at peak efficiency. Certain models even allow you to take linens directly to an ironer. Even better, all of our soft-mount, high-speed washer-extractors feature a suspension system that eliminates the need for machine boltdown, allowing for a less expensive and more flexible installation.

Maytag® Energy Advantage™ front-load washers with the TurboWash™ system offer utility savings up to 60%!*

When your business depends on clean laundry, you can't afford downtime. Maytag® equipment is built with a simple design and high-quality parts to keep operating reliably—load after load. Service and parts are easy to access from your professional Maytag distributor.

*Maytag Commercial front-load washer compared to commercial top-load washers.




**WITH OUR
ENERGY
ADVANTAGE™
LAUNDRY
PRODUCTS,
WE OFFER
MORE
ENERGY-SAVING
SOLUTIONS
THAN ANY
OTHER BRAND.**



MFR30/40/60/80PN



MFS25/35/50/80PNF
MFS100/125PF

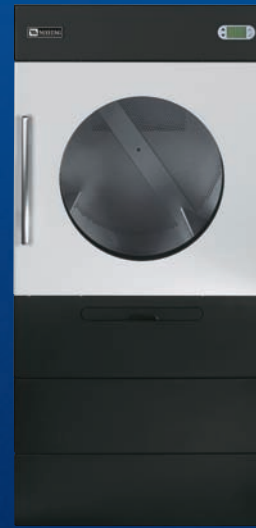

MDG31/51/77PN



MDG30/50/75MN/PN



MDG120PH/170PH

Maytag offers more high-efficiency laundry products than any other brand—from energy-efficient washers to highly efficient dryers to help you lower operating costs.

On-premises laundry markets include:

- Hotels and motels
- Hospitals
- Nursing homes
- Assisted living

We offer several payment type options to fit your needs.

- MN – Mechanical Control
- PD – Microprocessor Coin-Drop
- PN – Microprocessor Non-Coin
- PR – Microprocessor Debit Card
- CS – Mechanical Control Slide

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ RIGID-MOUNT FRONT-LOAD WASHERS

- Innovative TurboWash™ system delivers more cleaning power while using less water.
- One-touch cycle selection and multilingual read-outs make it easy for anyone to operate.
- Large 30-, 40-, 60- or 80-pound capacities to fit your needs.
- Inverter drive technology offers better efficiency and longer life.
- External chemical supply hookup for chemical injection.

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ SOFT-MOUNT HIGH-SPEED EXTRACTORS

- Suspension system eliminates the need for machine bolt-down, allowing for more flexible installation options.
- High-speed extraction up to 1,000 rpm and 350 G's cuts drying time and energy usage.
- Advanced Computer controls make operation simple.
- Microprocessor controls offer 15 preprogrammed cycles, plus the capacity to create up to 99 unique cycles.
- Large 25-, 35-, 50-, 80-, 100- or 125-pound capacities to fit your needs.
- Heavy-duty construction withstands industrial use.
- External chemical supply hookup for chemical injection.

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ ON-PREMISES DRYING TUMBLERS

- Lowest-BTU dryer on the market saves up to 20% in energy and utility costs.
- S.A.F.E. system automatically suppresses fires.
- Extra-large door and drum openings allow quick, easy loading and unloading.
- Advanced Computer Trac® controls make operation simple.
- Large 30-, 50- or 75-pound capacities to fit your needs.
- Single phase reverse tumble feature reduces linen twisting (on MDG51/77PN only).
- Better-sealed dryer keeps heated air in the dryer tumbler saving energy.
- Auto dry feature provides additional energy savings.

MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLERS

- PN models have programmable controls which provide drying flexibility.
- PN models offer the reverse tumble feature which reduces linen twisting.
- MN models offer dual timers that show drying and cool down times.
- Easy-access design for convenient self-service.
- Extra-large door opening makes loading and unloading easy.
- Large 30-, 50- or 75-pound capacities to fit your needs.

MAYTAG® COMMERCIAL ON-PREMISES LARGE CAPACITY DRYING TUMBLERS

- Dry big loads fast—save time and energy costs by drying more at once.
- S.A.F.E. system automatically suppresses fires.
- Heavy-duty belt drive and pulley system deliver trouble-free performance.
- Extra-large, waist-high door opening allows for easy loading and unloading.
- Extra-large 120- or 170-pound capacities to fit your needs.
- Reverse tumble feature reduces linen twisting.



OUR DURABLE, REVENUE-GENERATING GUEST LAUNDRY EQUIPMENT OFFERS GREAT CLEANING, EFFICIENT DRYING AND EASY OPERATION.

MAYTAG CAN ALSO HANDLE YOUR SMALLER LOADS.



MAT15MN & MDE/MDG17MN



MAH22PR & MDE/MDG22PR



MAT14PR/PD/CS & MDE/MDG17PR/PD/CS



MAH22PD & MDE/MDG22PD



MLE/MLG24PR/PD

Choose from our top-load washer, single-load dryer, super-capacity dryer or stacked two-dryer model when floor space is limited.

Maytag can also handle your smaller loads. Whether you use the equipment for back-of-the-house operations, or as revenue-generating guest laundry equipment, we put the same utility-saving features in our small equipment to help your operation run more profitably.

Small equipment markets include:

- Hotel Guest Services
- Restaurants
- Spas
- Bed & Breakfasts
- Uniform and Rug Cleaning, etc.

MAYTAG® COMMERCIAL TOP-LOAD WASHER

- Simple controls are easy to operate for multiple users.
- Our commercial top-load washers last longer than other leading brands.
- Dependable, direct-drive transmission has fewer parts for fewer repairs.

MAYTAG® COMMERCIAL SINGLE-LOAD DRYER

- TurboVent™ technology maintains performance in difficult installations—allows for venting up to 100 ft. with 3 elbows and a hood.
- Extra-large door and drum openings allow quick, easy loading and unloading.
- Simple controls are easy for multiple users to operate.
- Powerful, high airflow dries loads quickly and saves time.

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ HIGH-EFFICIENCY FRONT-LOAD WASHER

- Save up to 60%* per year on water, energy and sewer costs.
- High-speed extraction saves drying time and energy costs.
- No agitator means 20% greater capacity than a top-loading washer.
- Advanced Computer Trac® controls allow for easy programming.
- ENERGY STAR® and CEE Tier III qualified.

MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER

- TurboVent™ technology maintains performance in difficult installations—allows for venting up to 100 ft. with 3 elbows and a hood.
- Super commercial capacity handles big, bulky loads.
- Powerful, high airflow dries laundry efficiently.
- Extra-large door and drum openings allow quick, easy loading and unloading.

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ TOP-LOAD WASHER

- Easy-to-use, one-touch cycle selection is simple for multiple users to operate.
- Reduces water usage by 25%**.
- Super cycle option increases revenue.
- Porcelain-enamel top stays looking like new for years.
- Advanced Computer Trac® controls allow for easy programming.

MAYTAG® COMMERCIAL SINGLE-LOAD DRYER

- TurboVent™ technology maintains performance in difficult installations—allows for venting up to 100 ft. with 3 elbows and a hood.
- Extra-large door and drum openings allow quick, easy loading and unloading.
- Simple controls are easy for multiple users to operate.
- Powerful, high airflow dries loads quickly, saves time.

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ HIGH-EFFICIENCY FRONT-LOAD WASHER

- Save up to 60%* per year on water, energy and sewer costs.
- High-speed extraction saves drying time and energy costs.
- No agitator means 20% greater capacity than a top-loading washer.
- Advanced Computer Trac® controls allow for easy programming.
- ENERGY STAR® and CEE Tier III qualified.

MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER

- TurboVent™ technology maintains performance in difficult installations—allows for venting up to 100 ft. with 3 elbows and a hood
- Super commercial capacity handles big, bulky loads.
- Powerful, high airflow dries laundry efficiently.
- Extra-large door and drum openings allow quick, easy loading and unloading.

MAYTAG® COMMERCIAL SUPER-CAPACITY STACK DRYER/DRYER

- TurboVent™ technology maintains performance in difficult installations—allows for venting up to 100 ft. with 3 elbows and a hood.
- Two drying pockets fit in the floor space of one.
- Fast, efficient drying for lower energy consumption.
- Extra-large door and drum openings allow quick, easy loading and unloading.
- Drums have the capacity to hold any load that fits a Maytag® Commercial high-efficiency front-load or top-load washer.

*Compared to commercial top-load washer.
**Compared to Maytag® top-load washers manufactured before 2005.

Maytag® Commercial Laundry Specifications—WASHERS

	Energy Advantage™ Top-Load Washers	Top-Load Washer	Energy Advantage™ Front-Load Washer
WASHER SPECIFICATIONS			
MODELS	MAT14PR/PD/CS	MAT15MN	MAH22PR/PD
MOTOR			
Variable speed, reversible, high-efficiency, controlled induction			•
Single-phase, reversible, thermoprotected, high torque	•	•	•
Inverter drive, variable speed, reversing			
Reversing, thermoprotected			•
HP (kw)	.5 (.37)	.5 (.37)	.5 (.37)
Volts (Hz)	120 (60)	120 (60)	120 (60)
Export models—options available	220–240 (50) (CS only)	220–240 (50)	220–240 (50)
Voltage/breaker size: 120V/1 PH—amps 208–240V/1 PH (2-wire + ground)—amps	15	15	15
208–240V/3 PH (3-wire + ground)—amps			
Export models—220–240V—amps	10	10	10
SPEED			
Extract speed—maximum rpm	640	640	1,000
Extract force—maximum g-force	107	120	306
APPROXIMATE WATER USAGE			
Hot-water usage, average per cycle—gal. (liters)	3.7 (14)*	4.1 (15.5)*	3.5 (13.2)*
Overall—gal. (liters)	23.2 (87.8)*	30 (113.5)*	13.10 (49.6)*
WATER INLET/HOSE			
Water inlet—in. (mm)			
Operating pressure—psi (bar)	20–100 (1–8)	20–100 (1–8)	20–100 (1–8)
Inlet hose length—ft. (m)	4.5 (1.37)	4.5 (1.37)	4 (1.22)
Number of drain hoses	1	1	1
Drain hose length—ft. (m)	4.4 (1.3)	4.4 (1.3)	5.5 (1.7)
CAPACITY			
Lbs. (kg) dry weight			
Cylinder volume—cu. ft. (liters)	2.5 (70.8)	3.2 (90.6)	2.99 (84.7)
Cylinder diameter—in. (mm)	18.4 (468)	20.3 (516)	21.6 (547)
Cylinder depth—in. (mm)	17.8 (452)	17.4 (442)	13.4 (341)
COLORS			
White	•	•	•
Stainless Steel			
APPROXIMATE WEIGHT			
Crated—lbs. (kg) PR/PD & CS	165 (74.8)/178 (80.7)	179 (81.2)	249 (112.9)/263 (119.3)
Uncrated—lbs. (kg) PR/PD & CS	151 (68.5)/164 (74.4)	165 (74.8)	234 (106.1)/247 (112)
DIMENSIONS			
Height—in. (mm) PR/PD & CS	41 (1041)/43 (1092)	41 (1041)	37.85 (961.4)/44.67 (1134.5)
Width—in. (mm)	27 (686)	27 (686)	27 (685.8)
Depth—in. (mm)	25.5 (648)	25.5 (648)	29 (736.6)
Door opening diameter—in. (mm)	18 (457)	18 (457)	14.2 (361)
Door opening area—sq. in. (m²)			
WARRANTY	5-YR.	5-YR.	5-YR.

Energy Advantage™ Rigid-Mount Front-Load Washers				Energy Advantage™ Soft-Mount High-Speed Extractors		
MFR30PN	MFR40PN	MFR60PN	MFR80PN	MFS25PNF	MFS35PNF	MFS50PNF
•	•	•	•	•	•	•
1 (.75)	2 (1.5)	3 (2.2)	4 (3)	2 (1.5)	3 (2.2)	4 (3)
208–240V/1 PH or 3 PH	208–240V/1 PH or 3 PH	208–240V/1 PH or 3 PH	208–240V/1 PH or 3 PH	208–240V/1 PH or 3 PH	208–240V/1 PH or 3 PH	208–240V/3 PH
208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH
15	15	20	20	15	20	
15	15	20	20	15	20	20
525	505	490	510	1,000	980	860
100	100	100	133	300	350	310
varies by cycle						
varies by cycle						
.75 (19.05)	.75 (19.05)	.75 (19.05)	.75 (19.05)	.75 (19.05)	.75 (19.05)	.75 (19.05)
14.5–116 (1–8)	14.5–116 (1–8)	14.5–116 (1–8)	14.5–116 (1–8)	14.5–116 (1–8)	14.5–116 (1–8)	14.5–116 (1–8)
5 (1.52)	5 (1.52)	5 (1.52)	5 (1.52)	5 (1.52)	5 (1.52)	5 (1.52)
1	1	1	2	1	1	1
.25 (.076) O.D.	.25 (.076) O.D.	.25 (.076) O.D.	.25 (.076) O.D.	.25 (.076) O.D.	.25 (.076) O.D.	.25 (.076) O.D.
30 (13)	40 (18)	60 (27)	80 (35)	25 (10)	35 (16)	50 (22)
4.6 (130.2)	6.4 (181.2)	9.5 (270)	11.79 (355)	3.3 (93)	5.9 (166)	7.8 (220.9)
25.6 (650.2)	27.6 (701)	29.5 (749.3)	35.98 (914)	20.875 (530.2)	25.6 (650)	29.5 (750)
15.6 (396.2)	18.5 (470)	24 (610)	19.88 (505)	16.5 (420)	19.68 (500)	16.10 (410)
•	•	•	•	•	•	•
452 (205)	640 (290)	1,037 (470)	1,632 (740)	662 (300)	1,092 (495)	1,829 (830)
430 (195)	618 (280)	904 (410)	1,566 (710)	607 (275)	1,026 (465)	1,631 (739)
48.23 (1225)	51.75 (1314.5)	54.33 (1380)	57.48 (1460)	44.88 (1140)	50 (1295)	64.5 (1640)
29.53 (750.06)	33.7 (855)	34.25 (870)	43.7 (1110)	26 (66)	32.875 (835)	38.78 (985)
32.30 (820)	35.2 (895)	44.88 (1140)	44.88 (1140)	34 (865)	41 (1040)	45.66 (1160)
16.1 (408.9)	16.1 (409)	19.84 (504)	19.84 (504)	11.25 (285.8)	16.14 (410)	16.14 (410)
2-YR./5-YR.	2-YR./5-YR.	2-YR./5-YR.	2-YR./5-YR.	2-YR./5-YR.	2-YR./5-YR.	2-YR./5-YR.

Maytag® Commercial Laundry Specifications—WASHERS

	Energy Advantage™ Soft-Mount High Speed Extractors		
WASHER SPECIFICATIONS			
MODELS	MFS80PNF	MFS100PF	MFS125PF
MOTOR			
Inverter drive	•	•	•
HP (kw)	5 (4.0)	8 (6.0)	8 (6.0)
Voltage/breaker size: 208–240V/3 PH (3-wire + ground)—amps	30	40	40
SPEED			
Extract speed—rpm	830	830	830
Extract force—g-force	350	350	350
WATER INLET/HOSE			
Water inlet—BSP in. (mm)	1 (25.4)	1 (25.4)	1 (25.4)
Operating pressure—psi (bar)	14.5–116 (1–8)	14.5–116 (1–8)	14.5–116 (1–8)
Number of drain hoses	2	2	2
Drain Hose—ft. (m)	.25 (.076) O.D.	.25 (.076) O.D.	.25 (.076) O.D.
CAPACITY			
Lbs. (kg) dry weight	80 (36)	100 (45)	125 (57)
Cylinder volume—cu. ft. (liters)	11.8 (334)	14.2 (402)	18.3 (518)
Cylinder diameter—in. (mm)	36 (914.4)	36 (914.4)	36 (914.4)
Cylinder depth—in. (mm)	20 (510)	24 (610)	31 (790)
COLOR			
Stainless Steel	•	•	•
APPROXIMATE WEIGHT			
Crated—lbs. (kg)	3,020 (1,370)	3,748 (1,700)	3,902 (1,770)
Uncrated—lbs. (kg)	2,712 (1,230)	3,439 (1,560)	3,594 (1,630)
DIMENSIONS			
Height—in. (mm)	75 (1905)	75 (1905)	75 (1905)
Width—in. (mm)	47 (1194)	47 (1194)	47 (1194)
Depth—in. (mm)	52.4 (1331)	56.3 (1430)	63.4 (1610)
Door opening—in. (mm)	21.3 (541)	21.3 (541)	21.3 (541)
WARRANTY	2-YR./5-YR.	2-YR./5-YR.	2-YR./5-YR.

*Average based on J1 testing with factory preset cycles.

For detailed specifications and dimensional illustrations, please visit our web site at www.maytagcommerciallaundry.com. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

Maytag® Commercial Laundry Specifications—DRYERS AND STACKED UNITS

	Super-Capacity Dryers			Single-Load Super-Capacity Stack Dryer	Energy Advantage™ Multi-Load Dryers			Drying Tumblers		
DRYER AND STACKED UNIT SPECIFICATIONS	MDE/MDG17MN	MDE/MDG17PR/PD/CS	MDE/MDG22PR/PD	MLE/MLG24PR/PD	MDG31PN	MDG51PN	MDG77PN	MDG30MN/PN	MDG50MN/PN	MDG75MN/PN
MODELS										
MOTOR										
HP (kw) tumbler/blower	.33 (.25)	.33 (.25)	.33 (.25)	.34 (.25)	.25 (.186)/.50 (.37)	1 (.746)/.50 (.37)	1 (.746)/.50 (.37)	.50 (.373)	.75 (.560)	1 (.746)
Tumble speed—rpm	50 ± 1	50 ± 1	50 ± 1	50 ± 1.0	40 ± 1.5	40 ± 1.5	40 ± 1.5	43 ± 2	43 ± 2	40 ± 2
Reversing tumbler						•	•			•
ELECTRICAL REQUIREMENTS										
Volts (Hz)/phase										
Electric models	240 (60)***	240 (60)***	240 (60)***	240 (60)***						
Gas models	120 (60)	120 (60)	120 (60)	120 (60)/3	120 (60)	120 (60)	120 (60)	120 (60)	120 (60)	120 (60)
Export models—options available	220–240 (50)	220–240 (50) (CS only)	220–240 (50)	220–240 (50)	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH
BREAKER/FUSE REQUIREMENTS—AMPS										
Electric models (each drying chamber)	30	30	30	30						
Electric models—export (one terminal block per stack)	20	20	15	40						
Electric model—Canada (one terminal block per stack)				60						
Gas models (each drying chamber)	15	15	20	15	15	20	20	15	20	20
Gas models—export (one terminal block per stack)	10	10	10	15						
Heater element rating—watts	5,600	5,600	5,600	5,600						
Export models	4,600	4,600	4,600	4,600						
CAPACITY										
Lbs. (kg) dry weight	18 (8)	18 (8)	18 (8)	18 (8)	30 (13.6)	50 (22.7)	75 (34)	30 (13.6)	50 (22.7)	75 (34)
Cu. ft. (cu.m)	7.4 (.21)	7.4 (.21)	6.7 (.19)	7.4 (.21)	11.04 (.312)	16.02 (.454)	22.09 (.626)	12.5 (.354)	18.3 (.518)	22.4 (.634)
Tumbler diameter—in. (mm)	26.25 (667)	26.25 (667)	26.25 (667)	26.25 (666.8)	30 (762)	37 (939.8)	37 (939.8)	32.75 (832)	32.75 (832)	37 (940)
Tumbler depth—in. (mm)	22.85 (580)	22.85 (580)	20.40 (518)	22.85 (580.4)	27 (685.8)	25.75 (654)	35.5 (902)	25.63 (651)	37.5 (953)	36 (914.40)
AIRFLOW										
Domestic models—cfm (cmm) per pocket—gas/electric	230 (6.5)/215 (6.1)	230 (6.5)/215 (6.1)	230 (6.5)/215 (6.1)	230 (6.5)/215 (6.1)	360 (10.2)	525 (14.8)	560 (15.8)	460 (13)	750 (21.2)	1,000 (28.3)
Export models—cfm (cmm) per pocket—gas/electric	230 (6.5)/215 (6.1)	230 (6.5)/215 (6.1)	230 (6.5)/215 (6.1)	230 (6.5)/215 (6.1)						
EXHAUST										
Exhaust duct diameter—in. (mm)	4 (100)**	4 (100)**	4 (100)**	4 (101.6)	6 (152)*	8 (203)*	8 (203)*	8 (203)	8 (203)	8 (203)
GAS RATING —per drying chamber										
MDG models—BTU/hr. (kcal/hr.)	24,000 (6,048)	24,000 (6,048)	24,000 (6,048)	24,000 (6,048)	55,000 (13,860)	90,000 (22,680)	110,000 (27,718)	100,000 (25,000)	150,000 (37,800)	175,000 (44,100)
MDG export models—BTU/hr. (kcal/hr.)	24,000 (6,048)	24,000 (6,048)	24,000 (6,048)							
Gas inlet M.N.P.T. in. (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	1 inlet, 3/8 (9.5)	1 inlet, 1/2 (12.7)	1 inlet, 1/2 (12.7)	1/2 F.N.P.T. (13)	1/2 (13)	3/4 F.N.P.T. (19)
COLOR										
White	•	•	•	•	•	•	•	•	•	•
Stainless Steel										•
APPROXIMATE WEIGHT										
Crated—lbs. (kg)—PR/PD & CS	140 (63.5)	140 (63.5)/153.5 (69.6)	144 (65.3)/163 (73.9)	275 (124.7)/290 (131.5)	310 (140.6)	565 (256.3)	620 (281.2)	571 (259)	700 (317.5)	771 (349.7)
Uncrated—lbs. (kg)—PR/PD & CS	126 (57.2)	126 (57.2)/139.5 (63.3)	133 (60.3)/150 (68)	250 (113.4)/265 (120.2)	285 (129.3)	545 (247.2)	600 (272.16)	534 (242.2)	651 (295.3)	721 (327)
DIMENSIONS										
Height—in. (mm)	35 (889)	35 (889)	27.85 (961.4)	76.75 (1949)	66.78 (1696)	77.5 (1969)	77.5 (1969)	72 (1829)	72 (1829)	75.13 (1908)
Width—in. (mm)	27 (685.8)	27 (685.8)	27 (685.8)	27 (685.8)	31.12 (791)	38.25 (971.6)	38.25 (971.6)	34.25 (870)	34.25 (870)	38.25 (971.5)
Depth—in. (mm)	29.25 (742.9)	29.25 (742.9)	29 (736.6)	29 (736.6)	34.5 (876)	39.25 (997)	85.69 (2177)	36.88 (937)	48.50 (1232)	47 (1194)
Door opening diameter—in. (mm)					19.39 (492)	27.38 (695.5)	27.38 (695)	21.5 (546)	21.5 (546)	21.5 (546)
Door opening area—sq. in. (m²)	224 (0.14)	224 (0.14)	192.75 (0.12)	224 (0.14)						
WARRANTY	5-YR.	5-YR.	5-YR.	5-YR.	2-YR.	2-YR.	2-YR.	2-YR.	2-YR.	2-YR.

Maytag® Commercial Laundry Specifications—DRYERS, Continued

	Multi-Load Dryers	
DRYER SPECIFICATIONS	MDG120PH	MDG170PH
MODELS		
MOTOR		
HP (kw) (blower)	3 (2.24)	7.5 (5.6)
Tumble speed—rpm	38	37
Reversing tumbler	•	•
ELECTRICAL REQUIREMENTS		
Volts (Hz)/phase		
Electric models		
Gas models	208–240 (60)/3	208–240 (60)/3
Export models—options available	208–240V/50–60Hz/1 PH or 3 PH	208–240V/50–60Hz/1 PH or 3 PH
BREAKER/FUSE REQUIREMENTS—AMPS		
Electric models—domestic (each drying chamber)		
Electric models—export (one terminal block per stack)		
Electric model—Canada (one terminal block per stack)		
Gas models (each drying chamber)	20	60
Gas models—export (one terminal block per stack)		
Approx. overall wattage draw per drying chamber		
Export models—wattage draw per drying chamber		
CAPACITY		
Lbs. (kg) dry weight	120 (54.4)	170 (77.1)
Cu. ft. (cu.m)	38.2 (1.08)	51.20 (1.45)
Tumbler diameter—in. (mm)	44.50 (1130)	51.50 (1308)
Tumbler depth—in. (mm)	42.50 (1080)	42.50 (1080)
AIRFLOW		
Domestic models—cfm (cmm) per pocket—gas / electric	2,150 (60.9)	3,700 (104.8)
Export models—cfm (cmm) per pocket		
EXHAUST		
Exhaust duct diameter—in. (mm)	14 (355.6)	18 (457.2)
GAS RATING —per drying chamber		
MDG models—BTU/hr. (kcal/hr.)	375,000 (94,500)	550,000 (138,600)
Gas inlet—F.N.P.T. in (mm)	1 1/4 (31.8)	1 1/2 (38.1)
COLOR		
White	•	•
APPROXIMATE WEIGHT		
Crated—lbs. (kg)	1489 (675)	2269 (1029)
Uncrated—lbs. (kg)	1349 (612)	2103 (954)
DIMENSIONS		
Height—in. (mm)	86.88 (2207)	100 (2540)
Width—in. (mm)	48.75 (1238)	55.88 (1419)
Depth—in. (mm)	62.5 (1588)	62.5 (1588)
Door opening diameter—in. (mm)	31.38 (797)	31.38 (797)
Door opening area—sq. in. (m²)		
WARRANTY	2-YR.	2-YR.

*Requires 8" (203mm) material if venting horizontally; 10" (254mm) if venting vertically.

**Use 4" (101.6mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, nonmetal or combustible duct.

***208-volt electrical element kit available.

For detailed specifications and dimensional illustrations, please visit our web site at www.maytagcommerciallaundry.com.

Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

Maytag® Limited Warranty:

2 Year – All parts **5 Year** – All parts **2-YR/5-YR** – 2 year all parts; 5 year – Shell, welded frame assembly, basket, shaft assembly, bearings and seals.





www.MAYTAGCOMMERCIALLAUNDRY.COM



1-800-662-3587

WHIRLPOOL CORPORATION, SJTC ANNEX, 2901 LAKESHORE DR., ST. JOSEPH, MI 49085 CMLL021A PRINTED IN THE U.S.A. 1/09